

FIG. 1

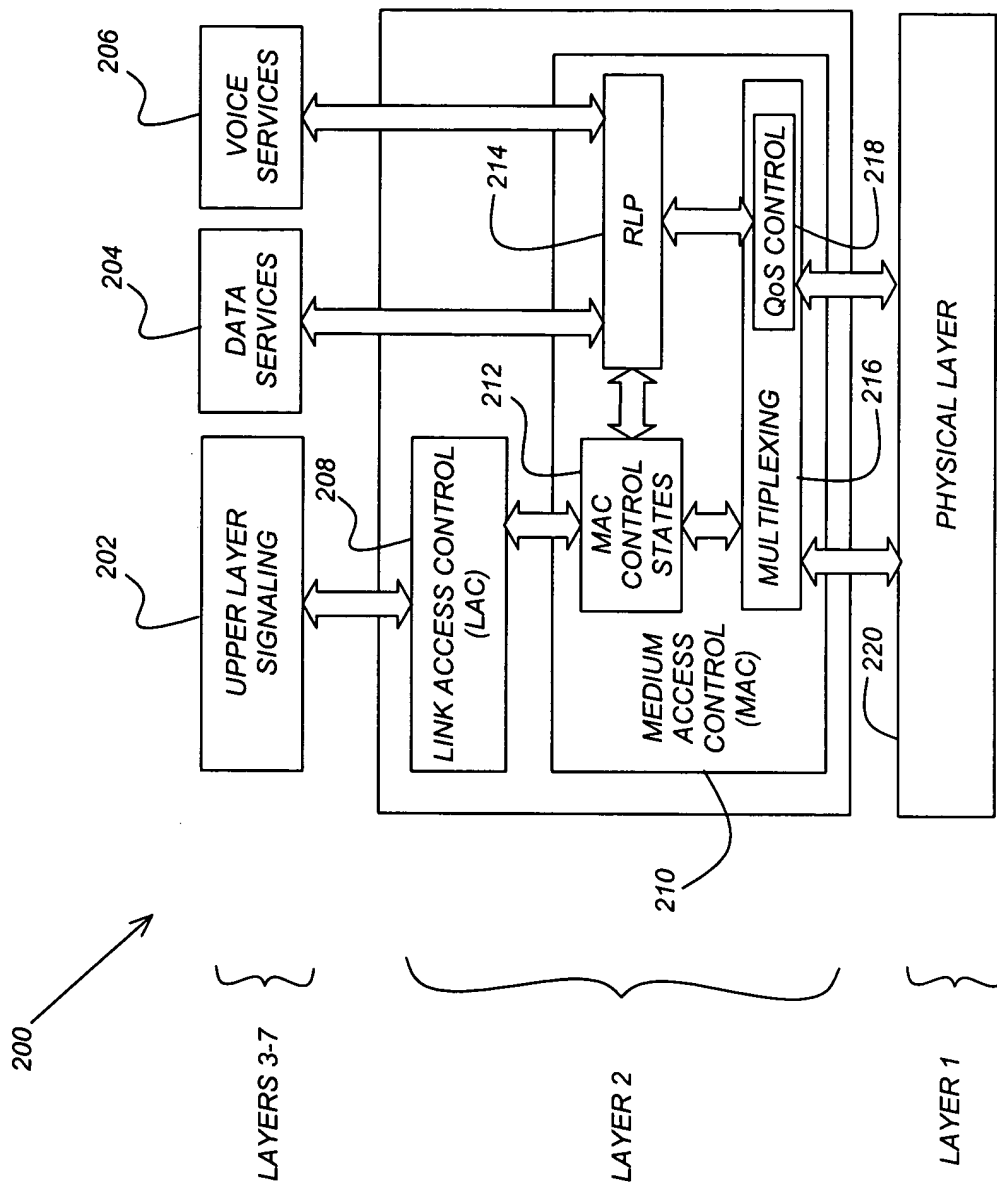


FIG. 2

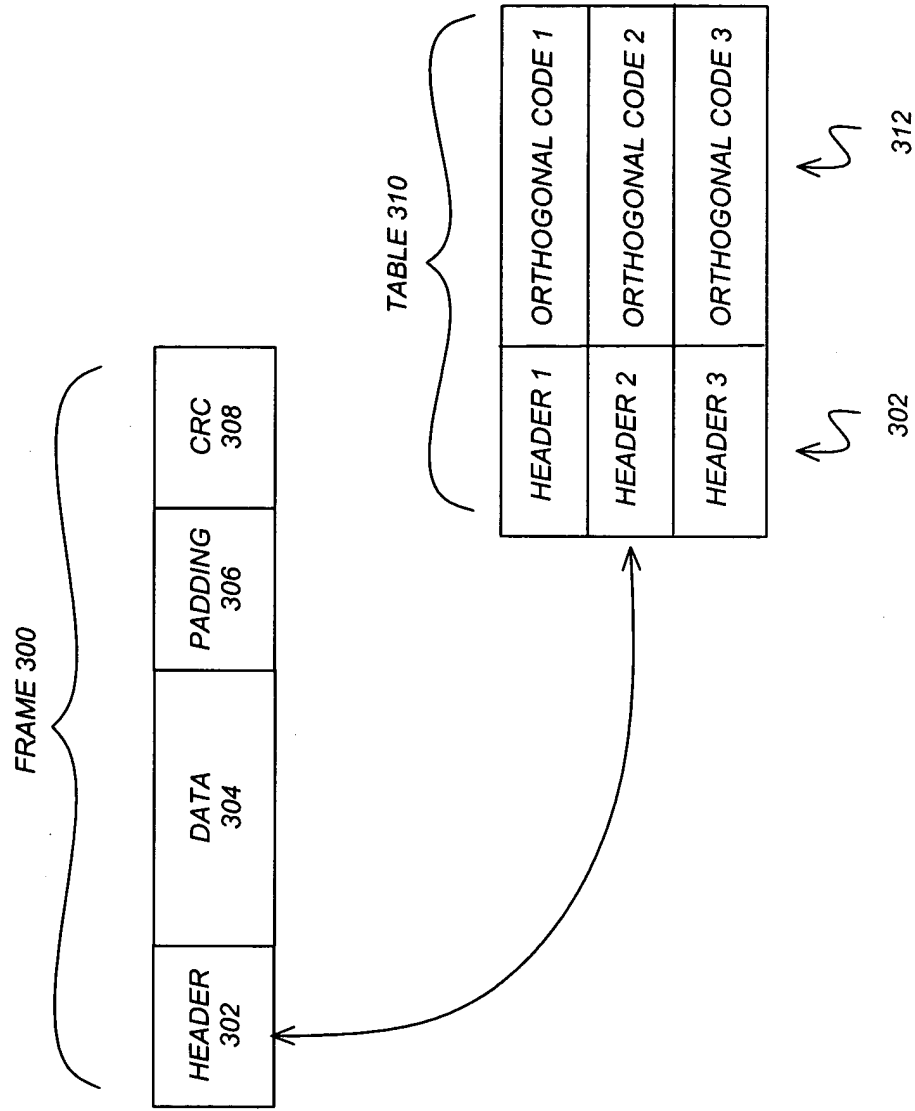


FIG. 3

```
graph TD; 400[DETERMINE BIT ERROR RATE AT RECEIVING STATION] --> 402[ADJUST TRANSMIT POWER AT TRANSMITTING STATION];
```

100

400 DETERMINE BIT ERROR RATE AT RECEIVING STATION

402 ADJUST TRANSMIT POWER AT TRANSMITTING STATION

**FIG. 4**

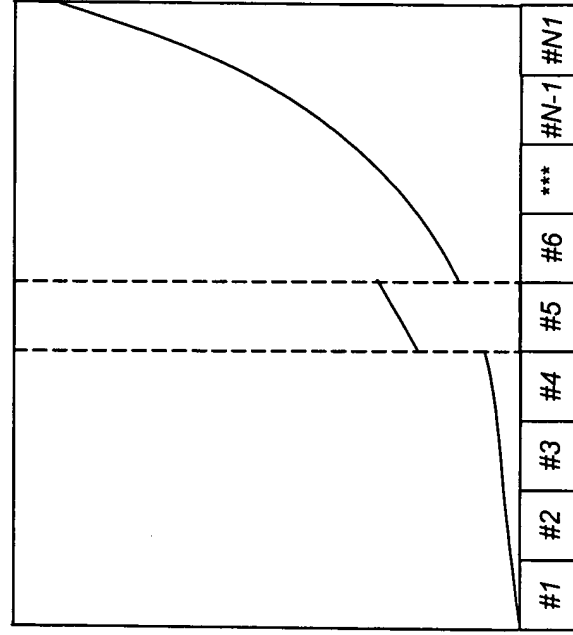


**FIG. 5**



0020257-6h5a2c60


TRANSMIT POWER



FRAME NUMBER

FIG. 6B

002021-6156260

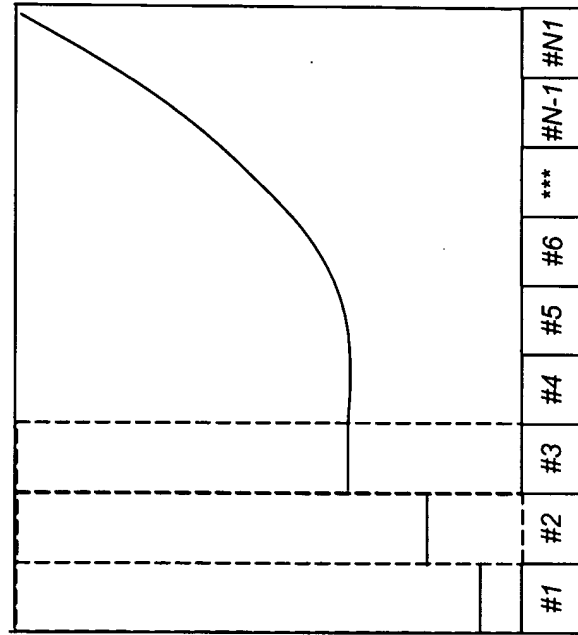

FRAME NUMBER

FIG. 6C





```
graph TD; 700[DETERMINE IF FRAME WAS RECEIVED IN ERROR AT RECEIVING STATION] --> 702[INCREASE TRANSMIT POWER AT TRANSMITTING STATION BASED ON FRAME POSITION];
```

700 DETERMINE IF FRAME WAS RECEIVED IN ERROR AT RECEIVING STATION

702 INCREASE TRANSMIT POWER AT TRANSMITTING STATION BASED ON FRAME POSITION

**FIG. 7**

0000000000000000

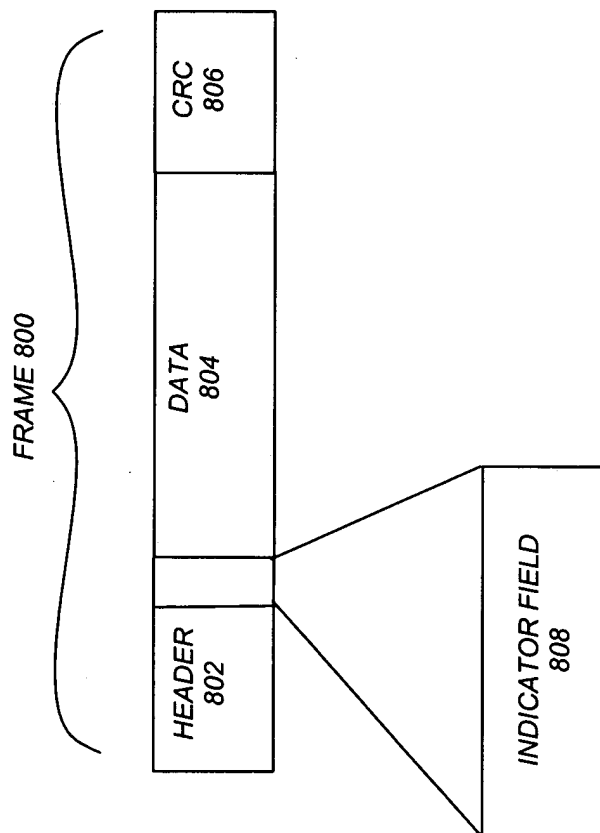


FIG. 8

0073540 100700

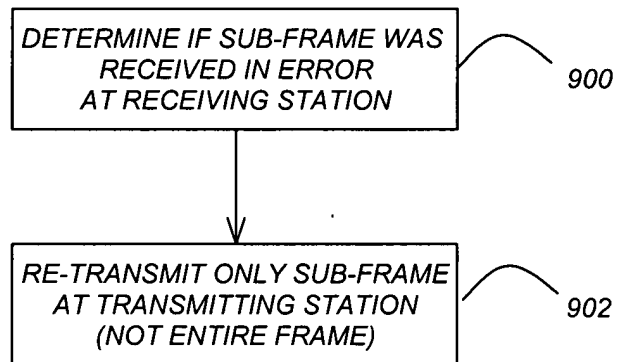


FIG. 9